

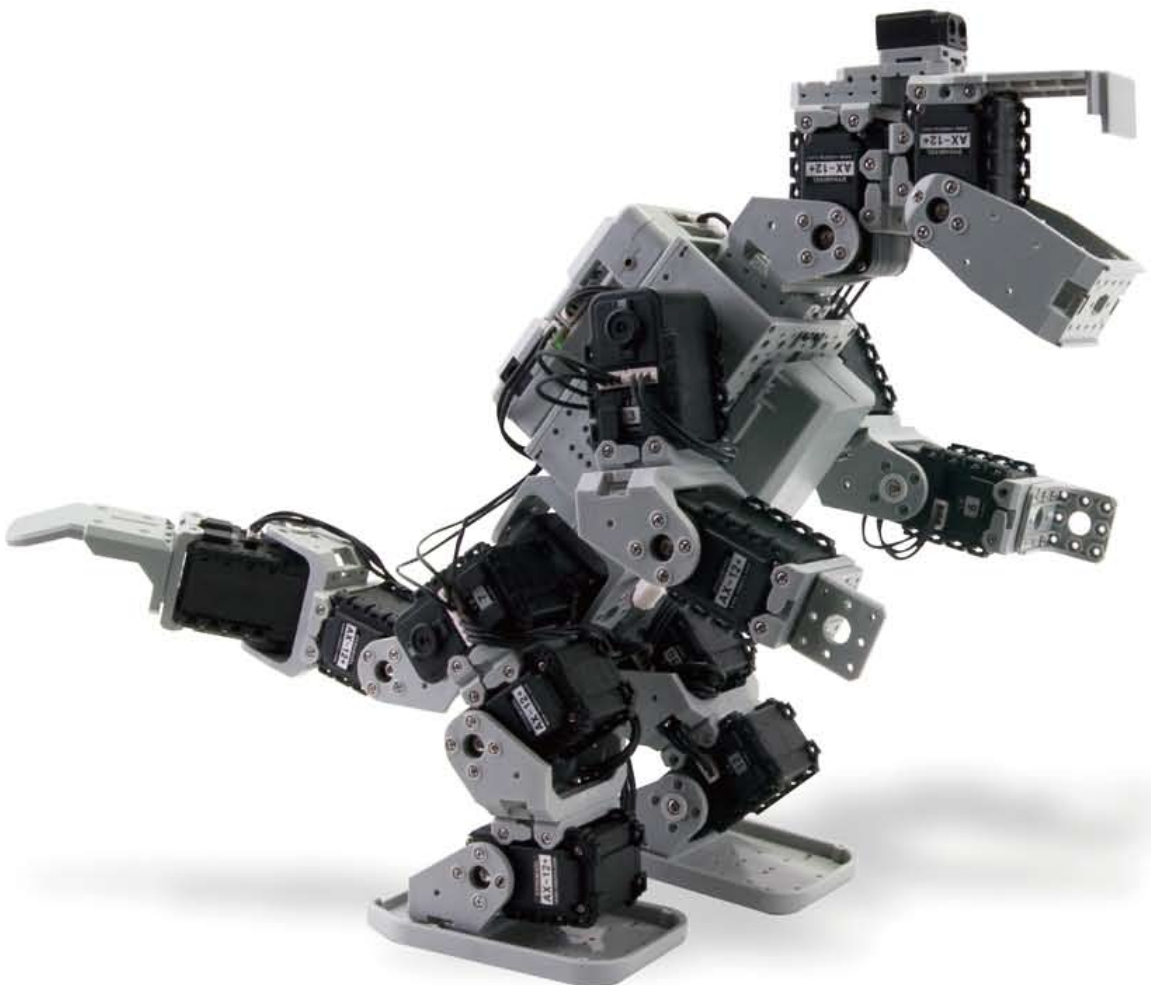


# BIOLOID


Dinosaur

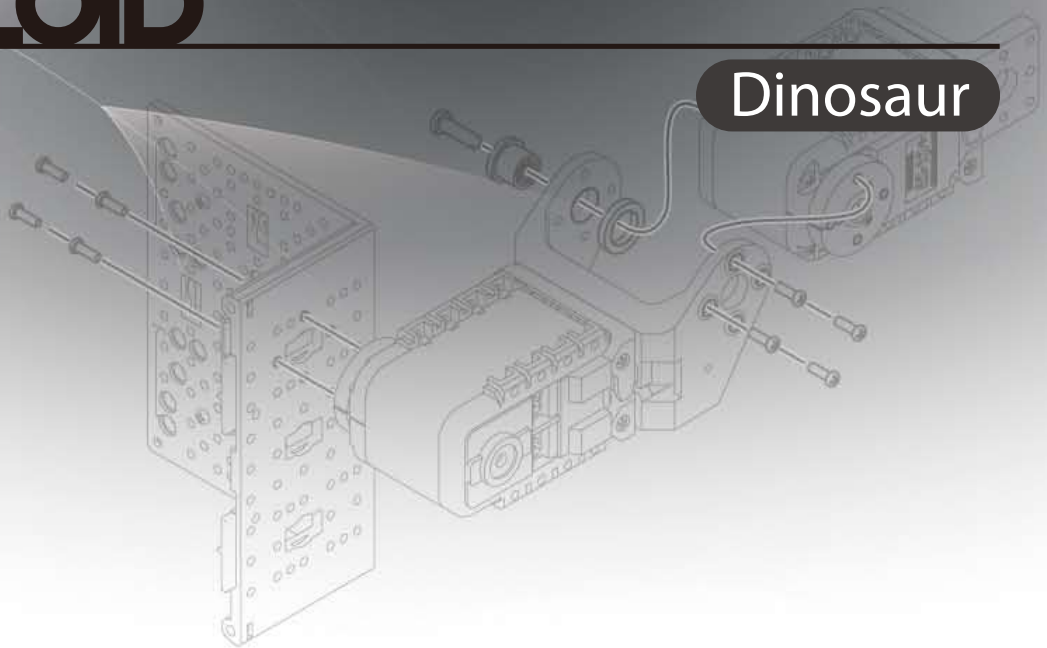


## STEP 1

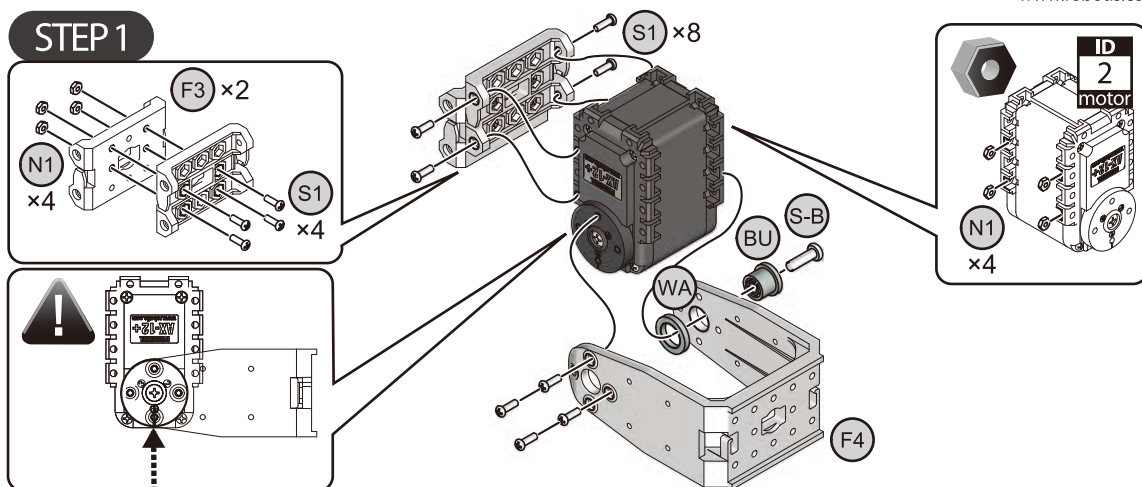


## STEP 2

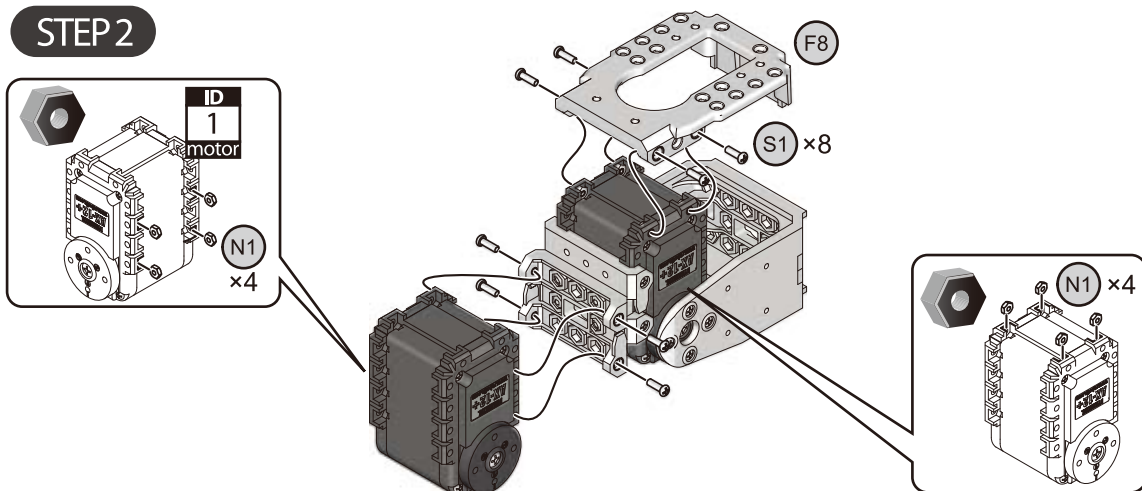


## STEP 3

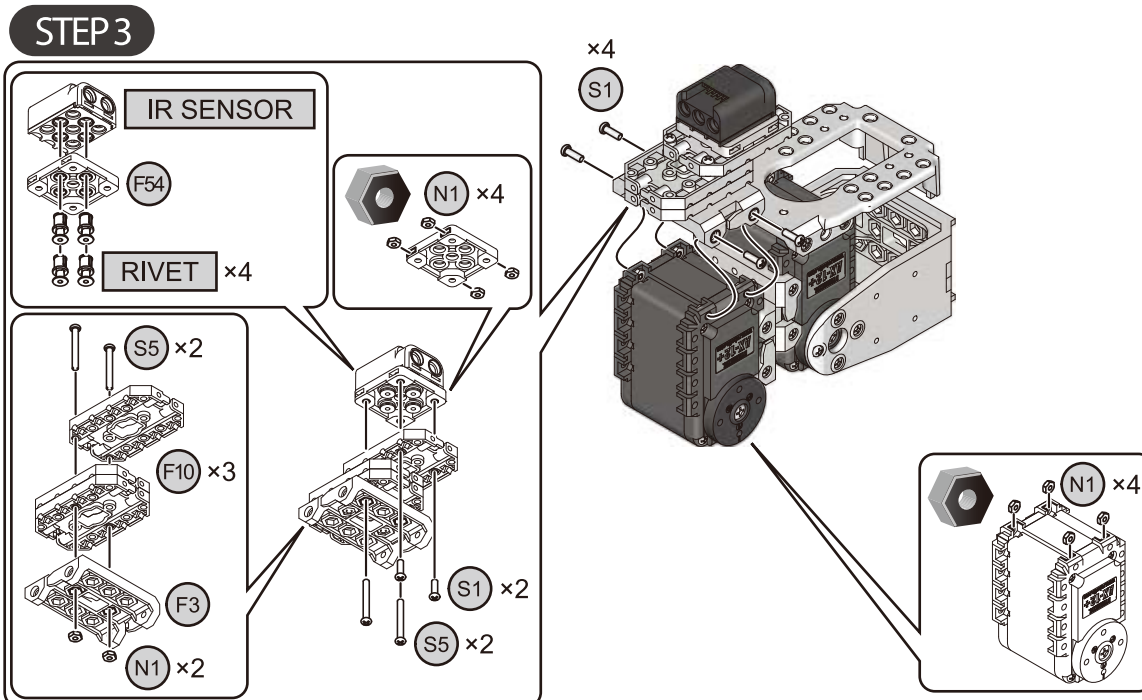


## STEP 4

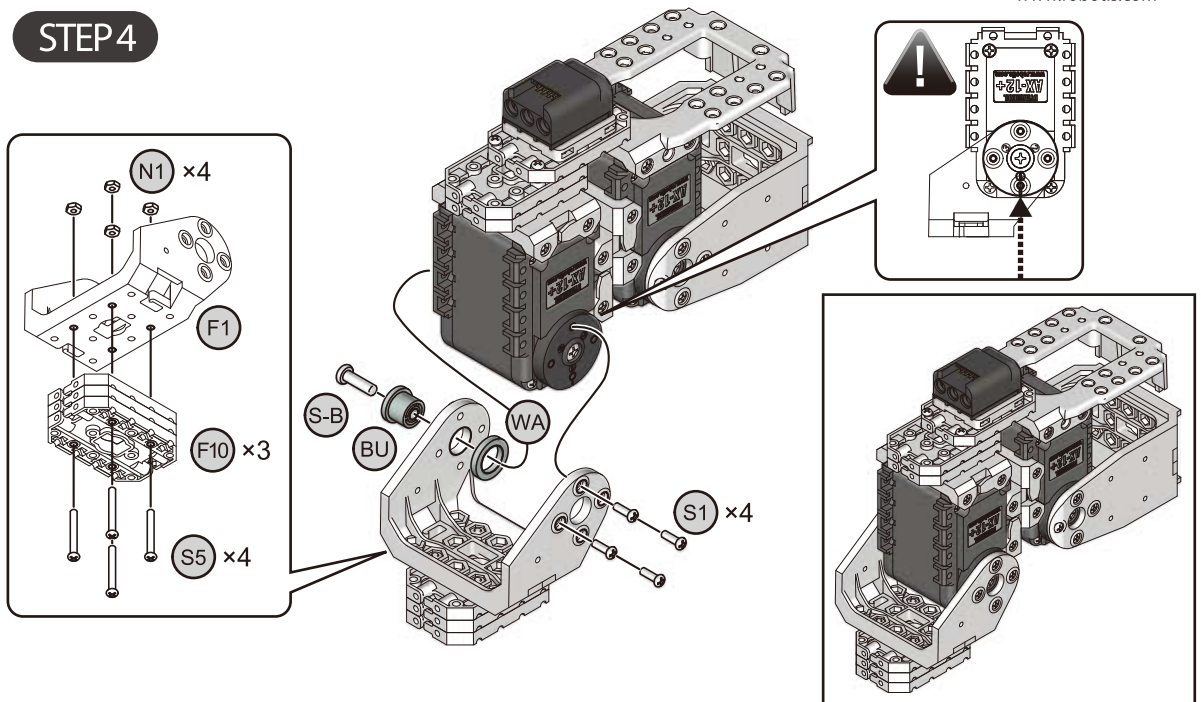


## STEP 5

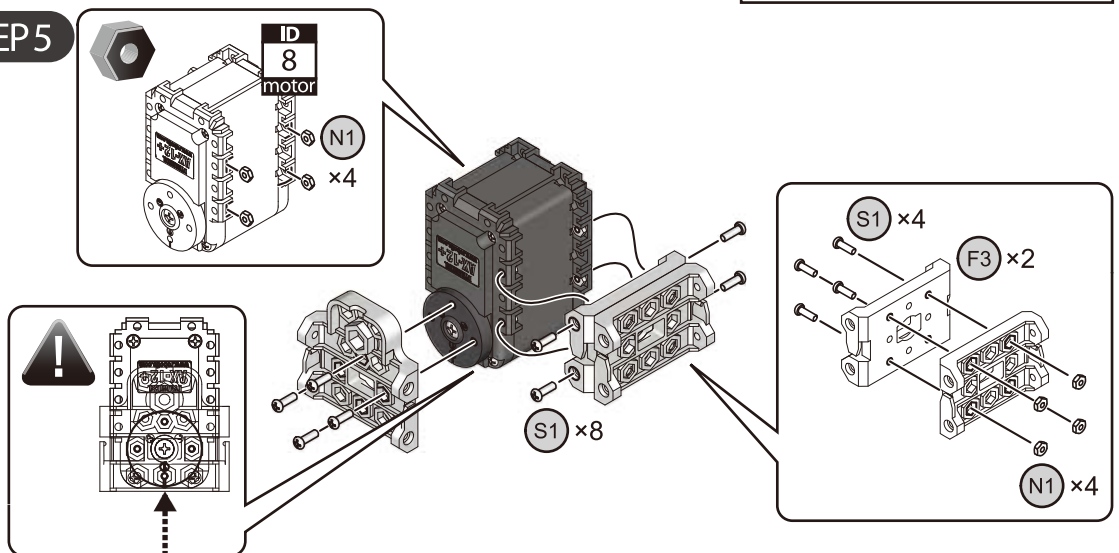


## STEP 6

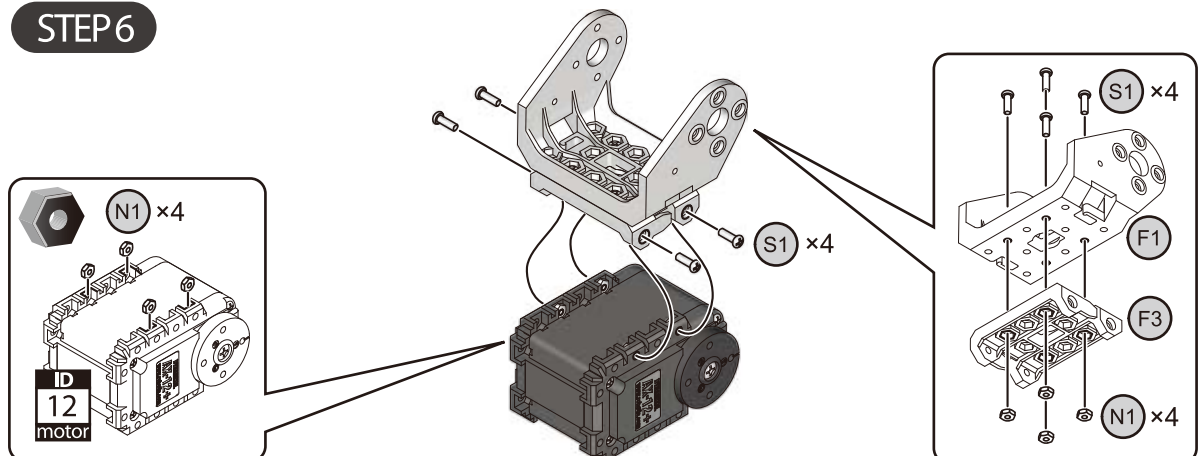


## STEP 7

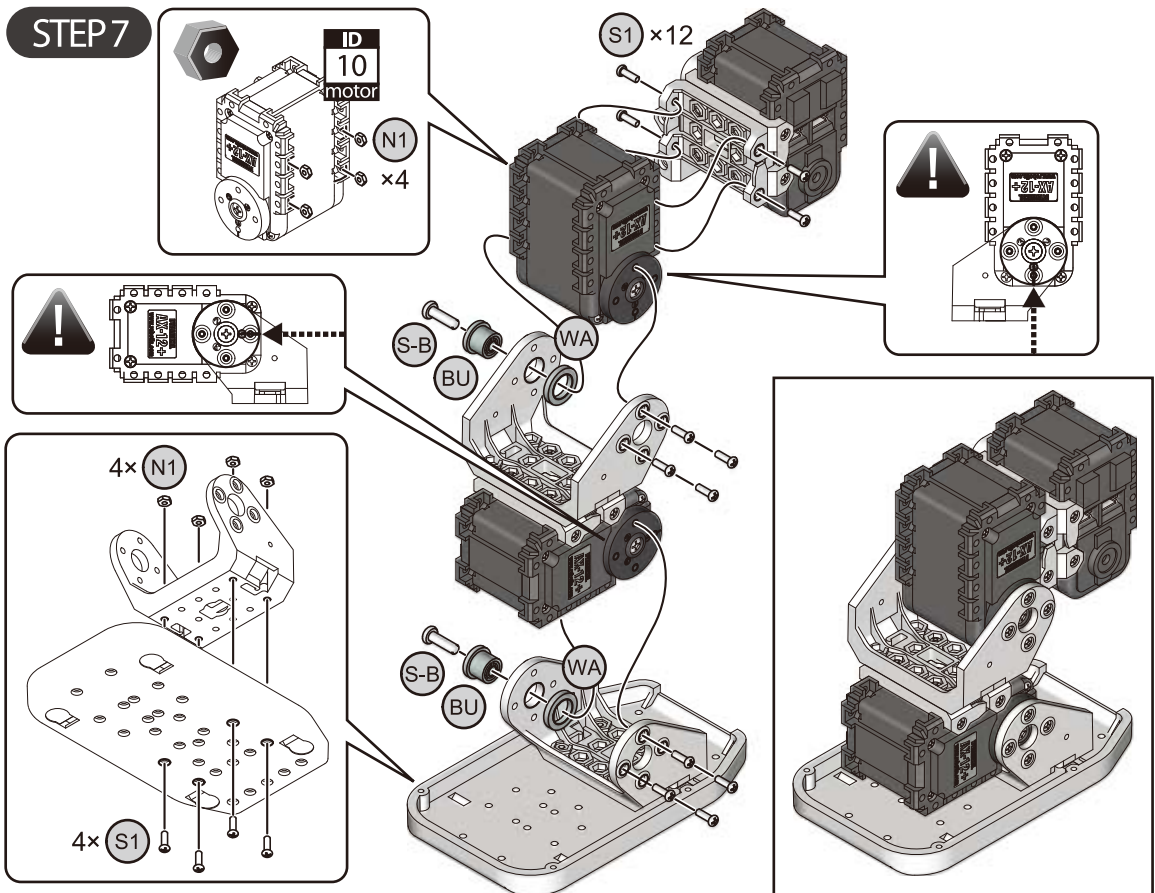

## STEP 8

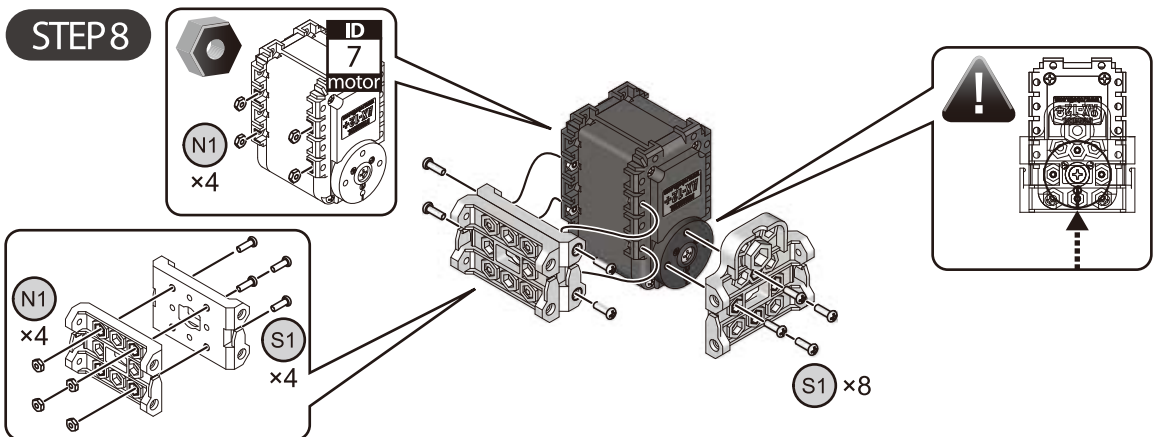


## STEP 9

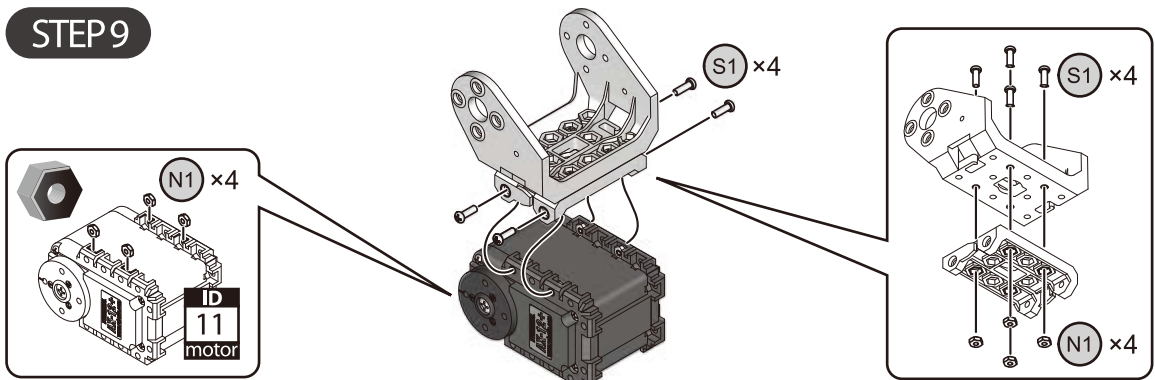





## STEP 10

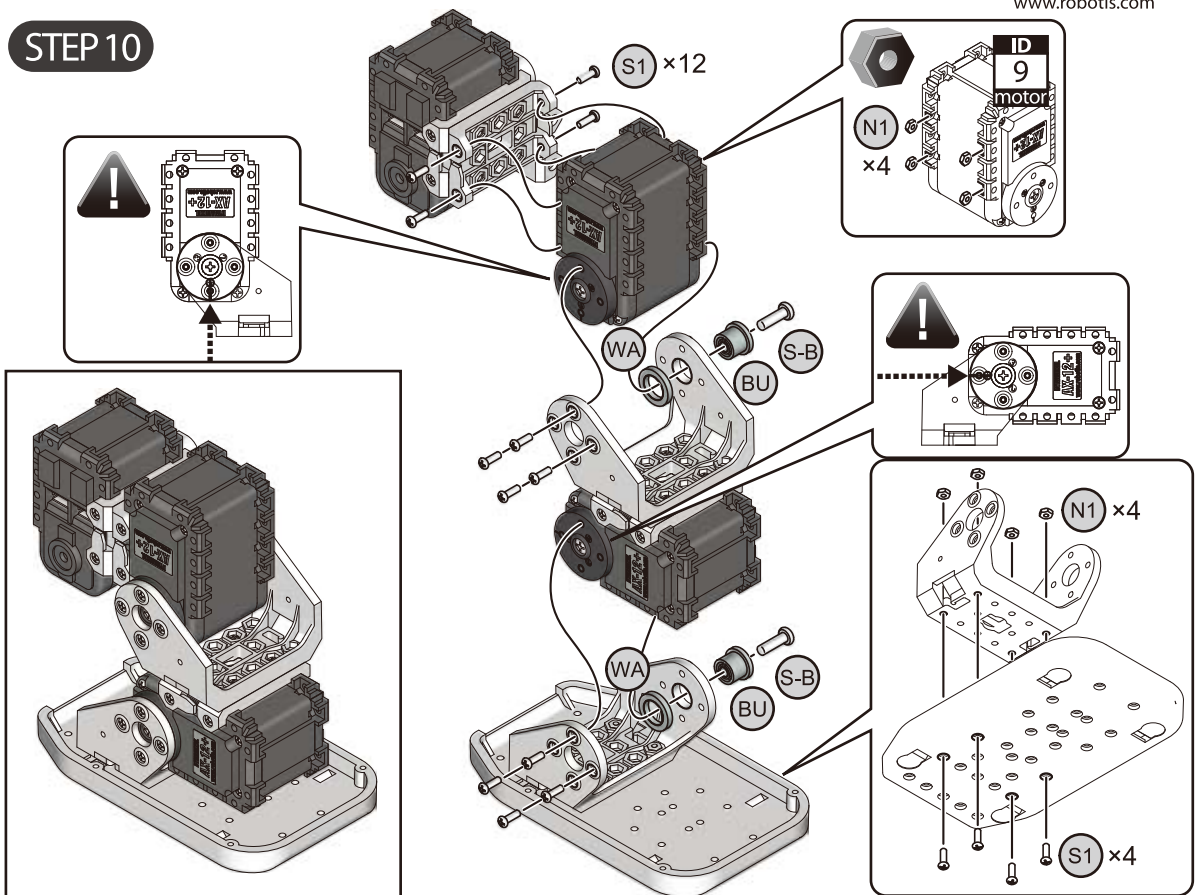


## STEP 11

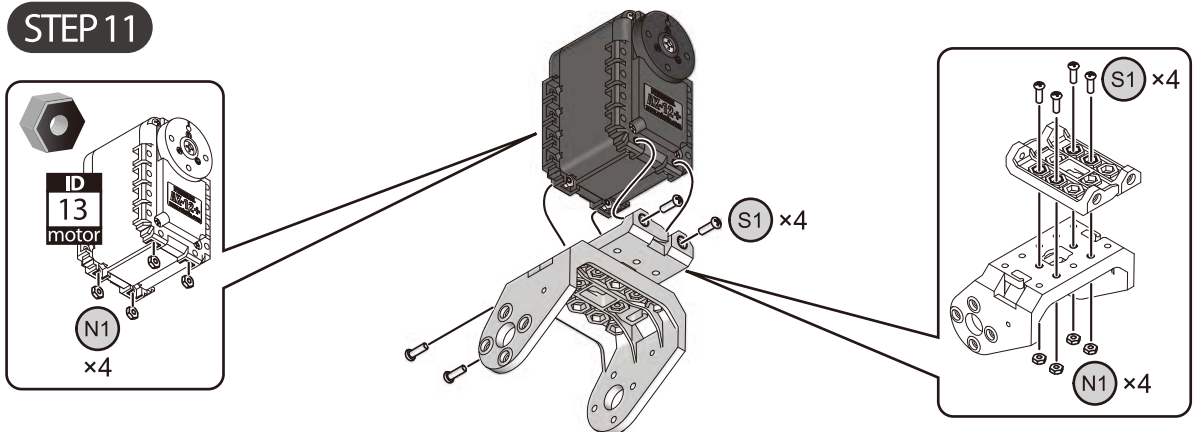


## STEP 12

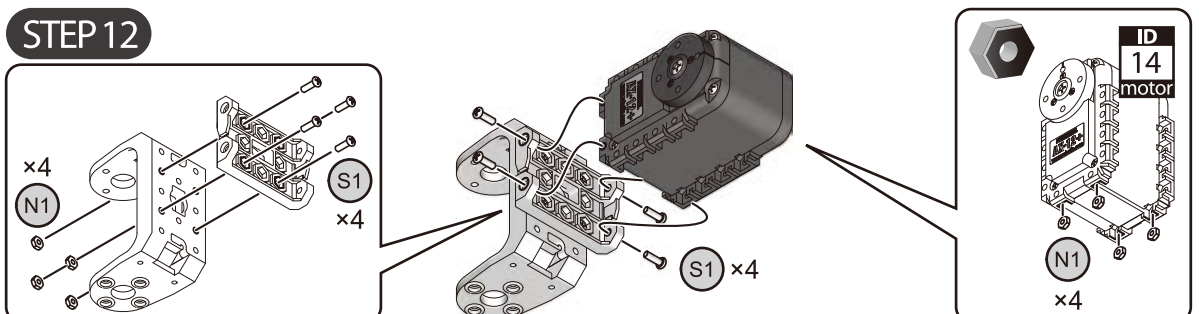


## STEP 13

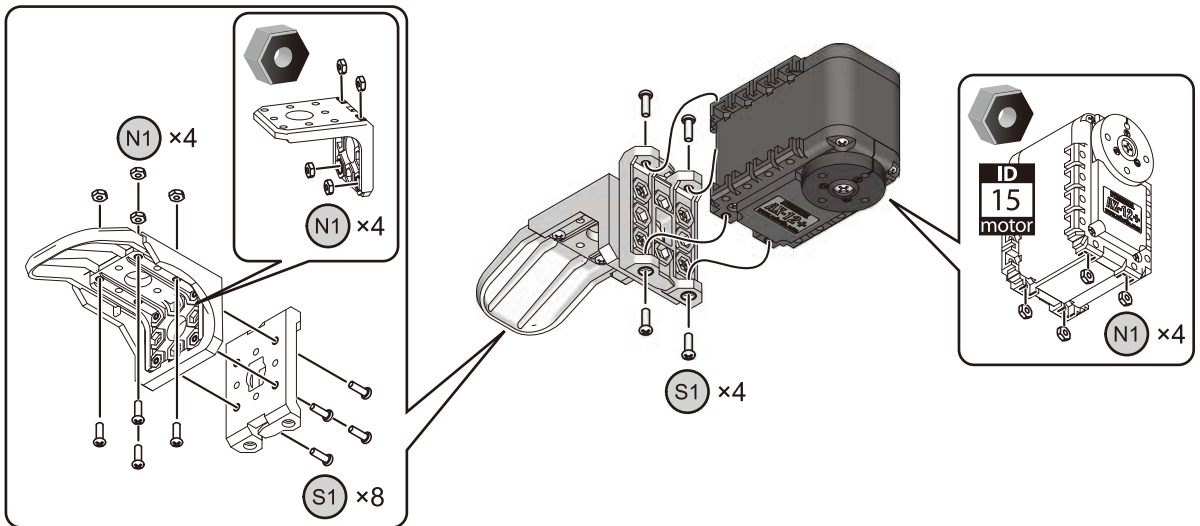


## STEP 14

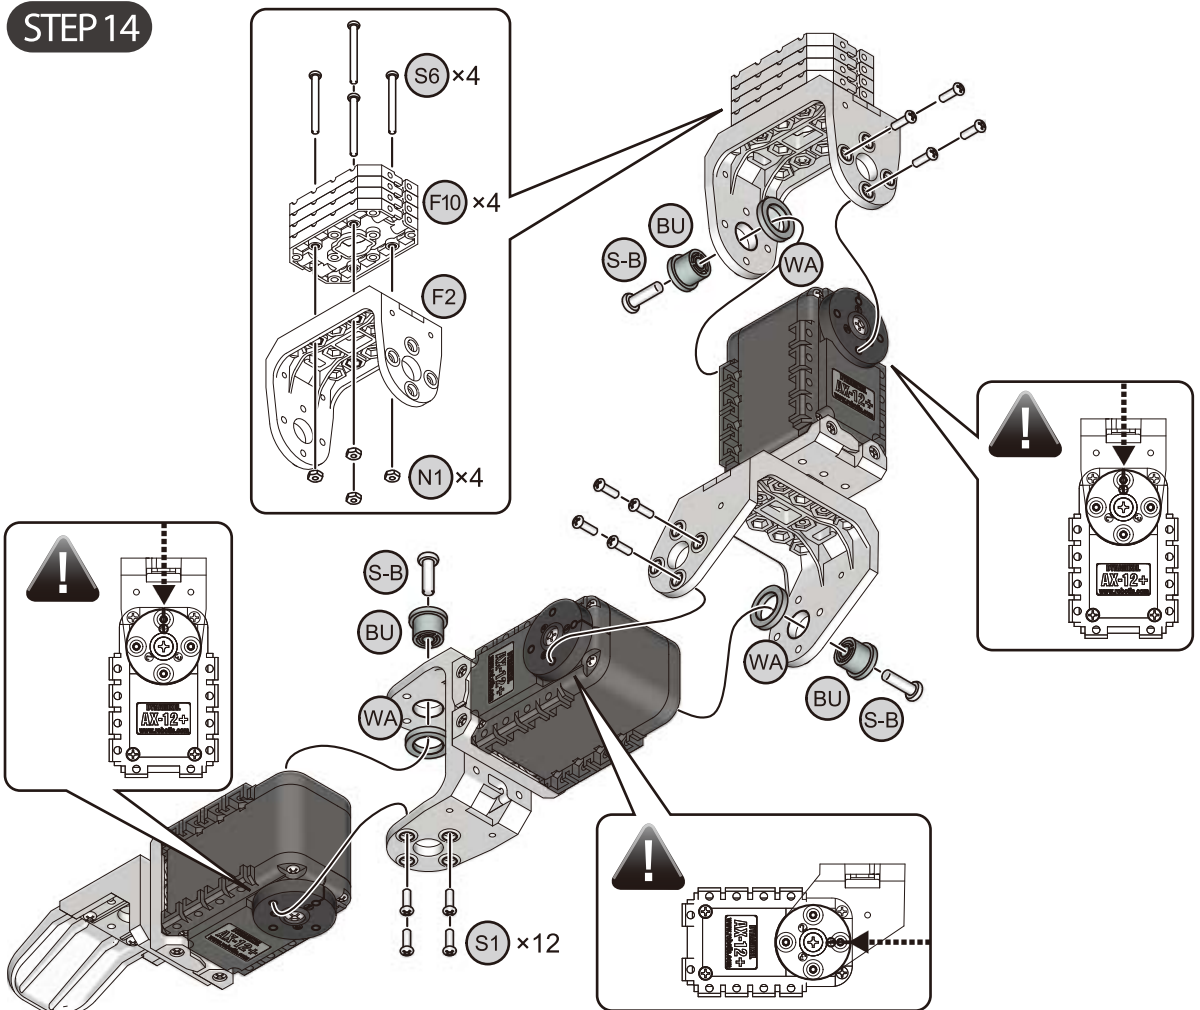


## STEP 15

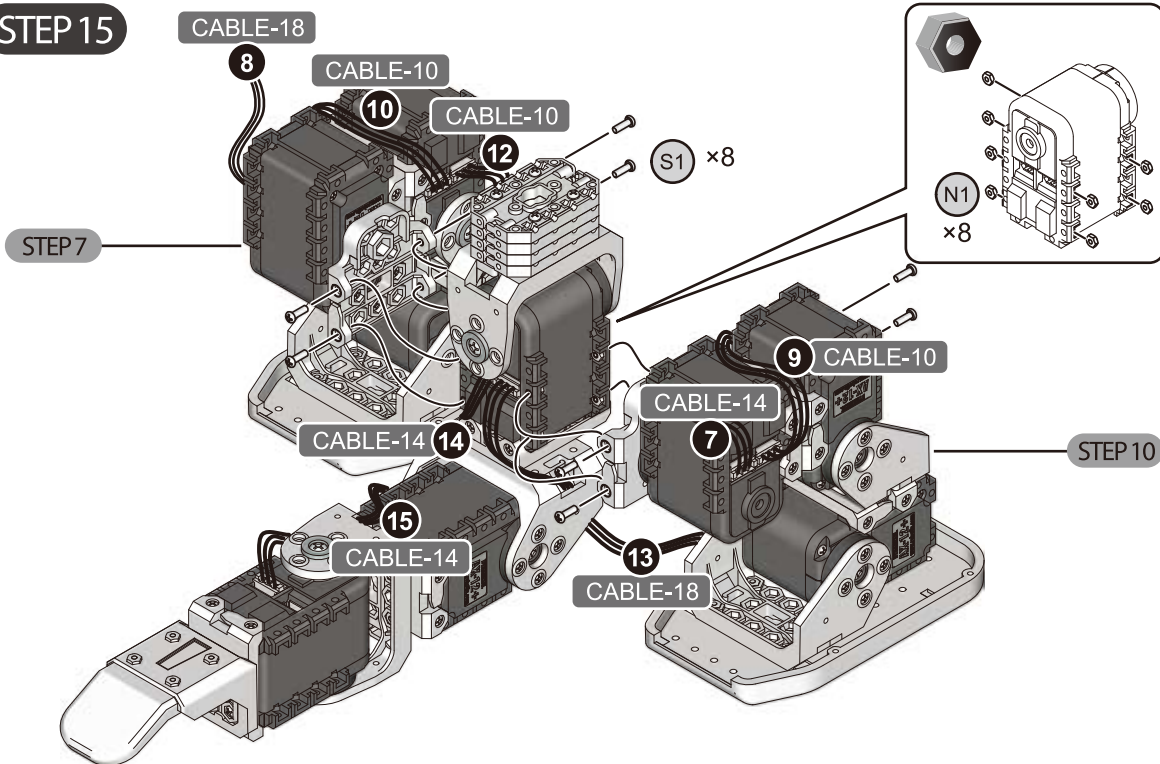


## STEP 16

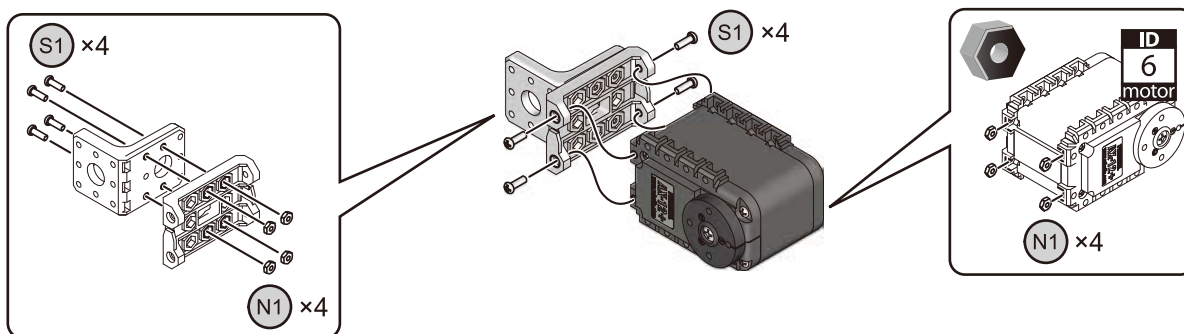


## STEP 17

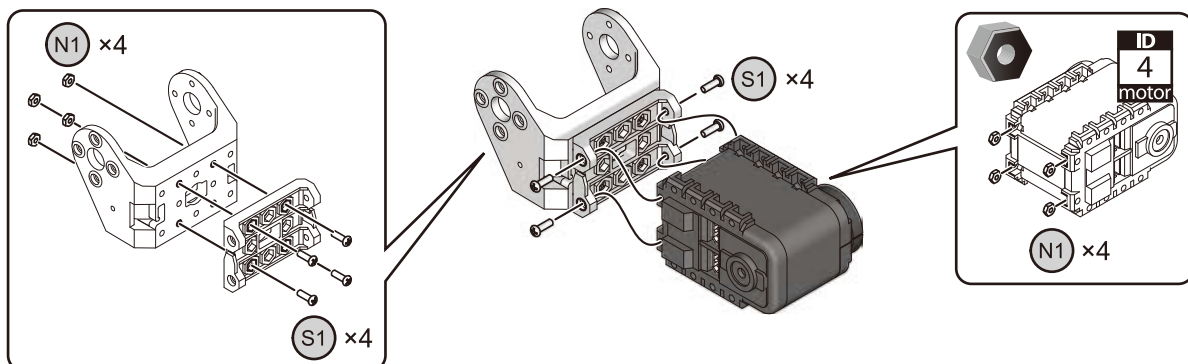


**STEP 18**

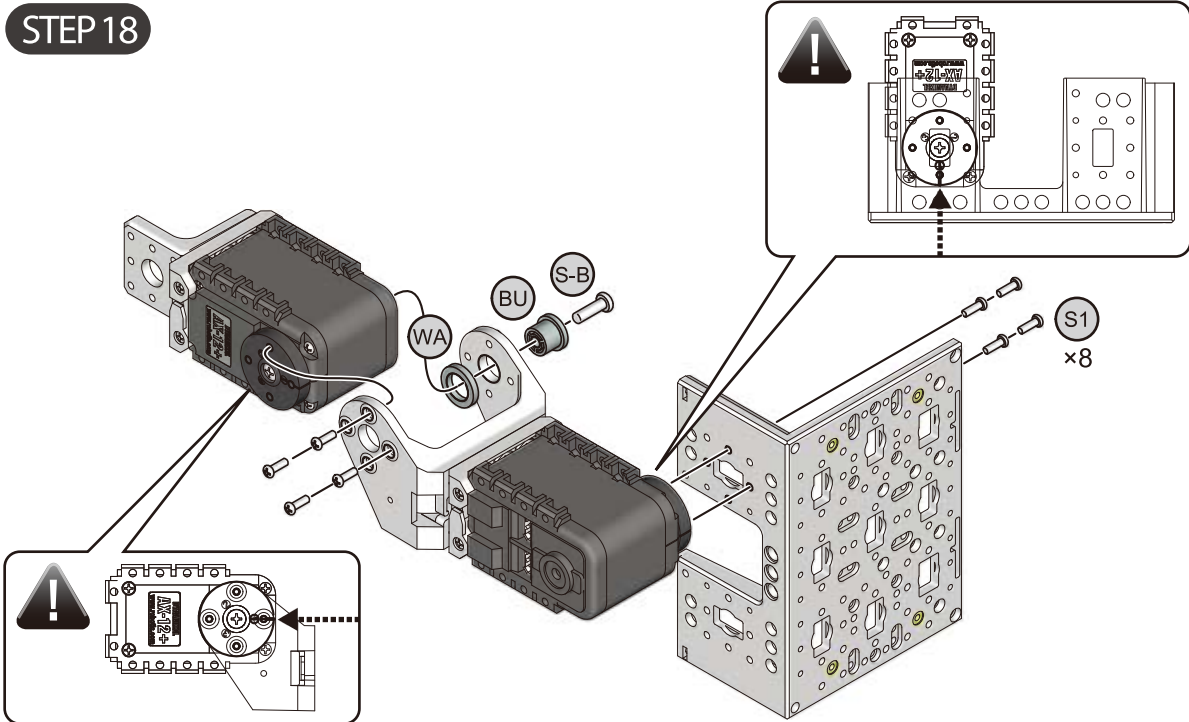

**STEP 19**

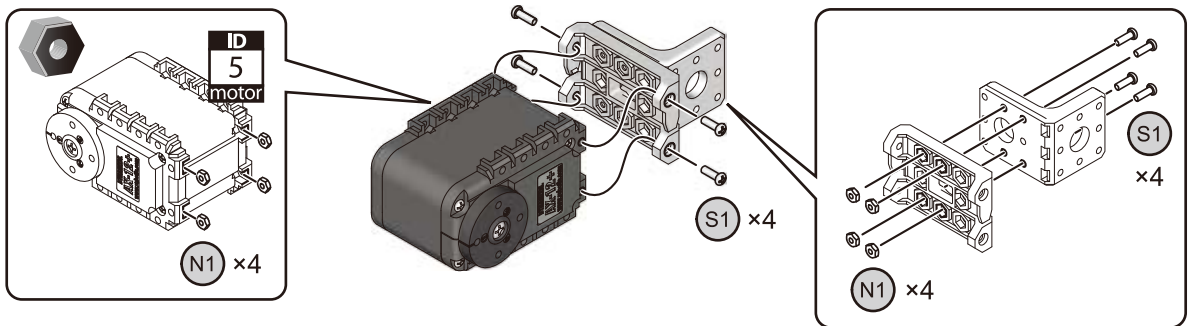


**STEP 20**

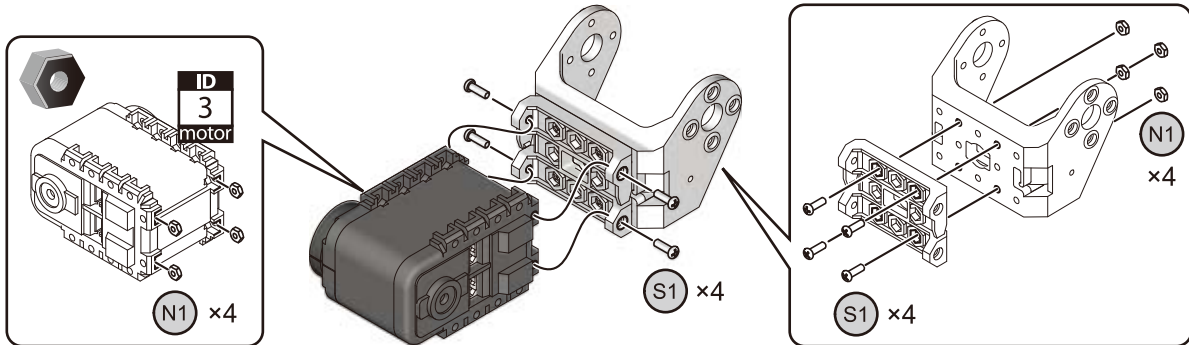





## STEP 21

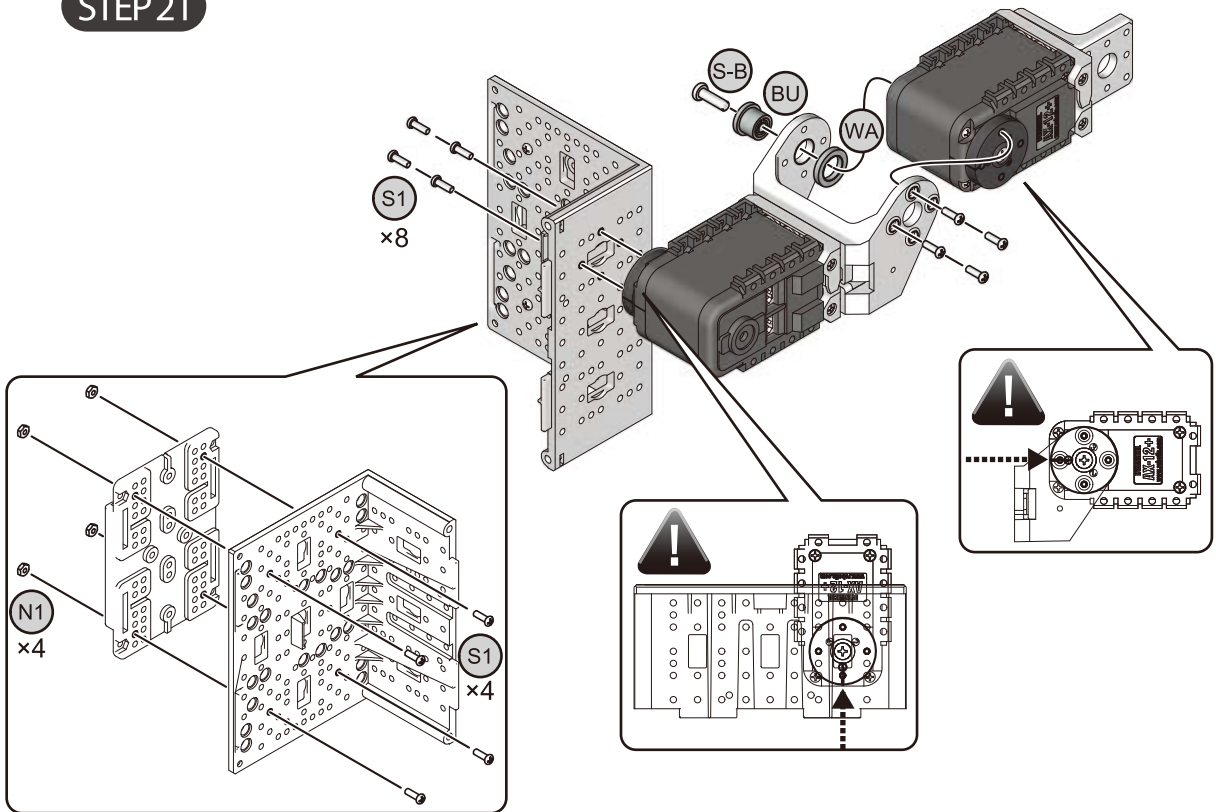


## STEP 22

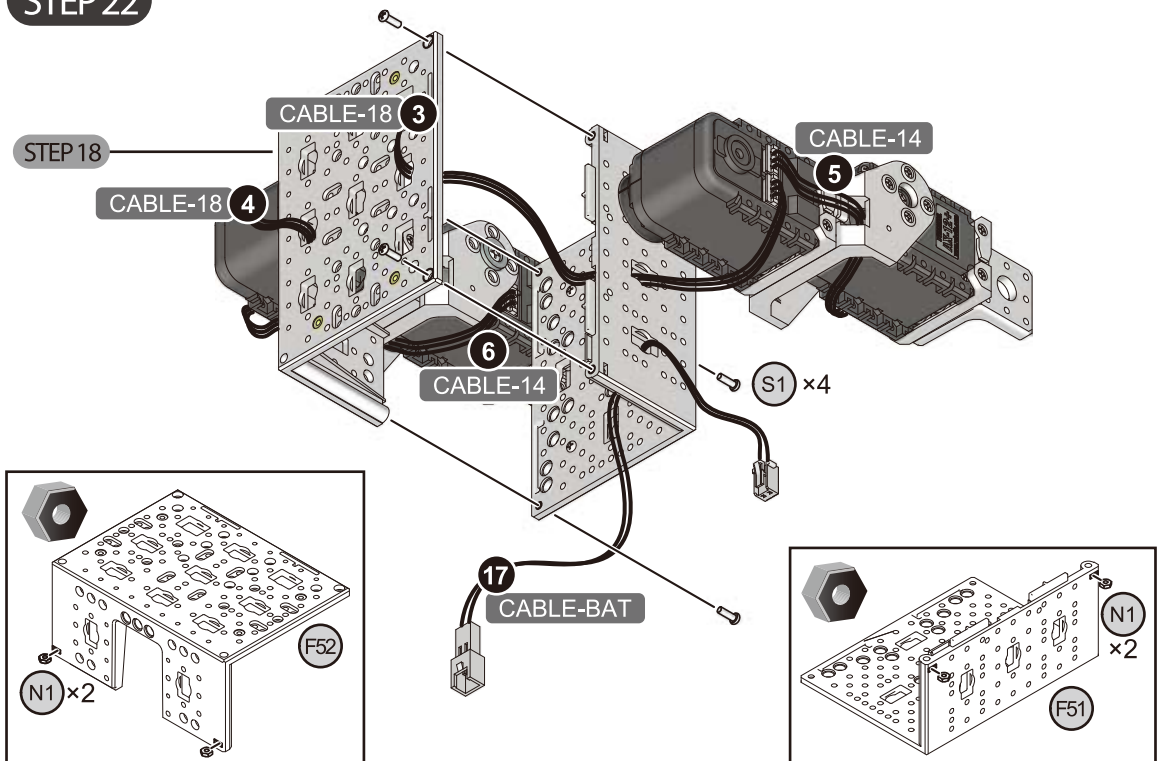


**STEP 23**

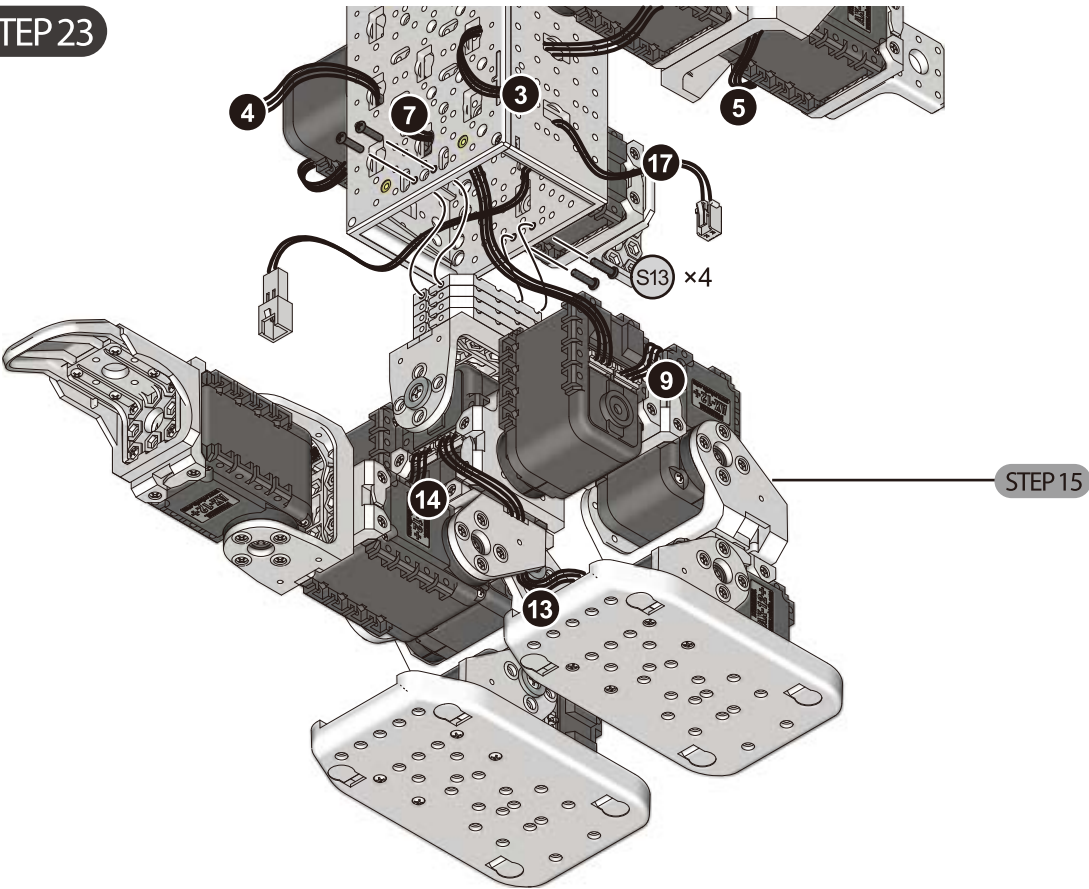

**STEP 24**

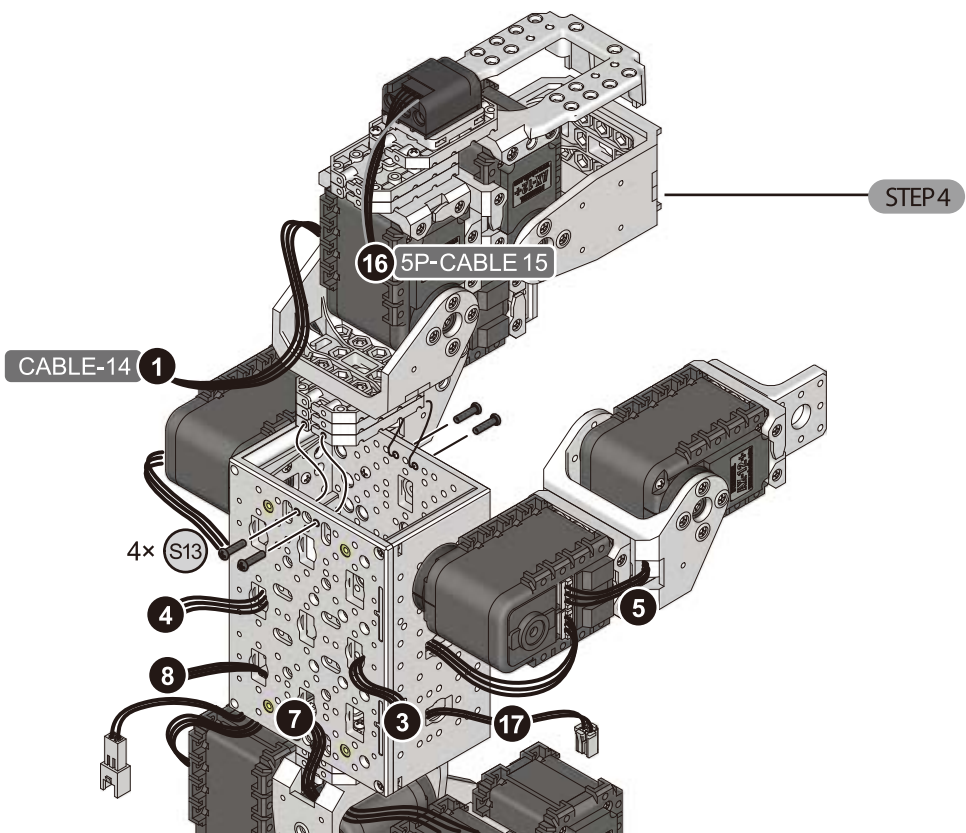



## STEP 25

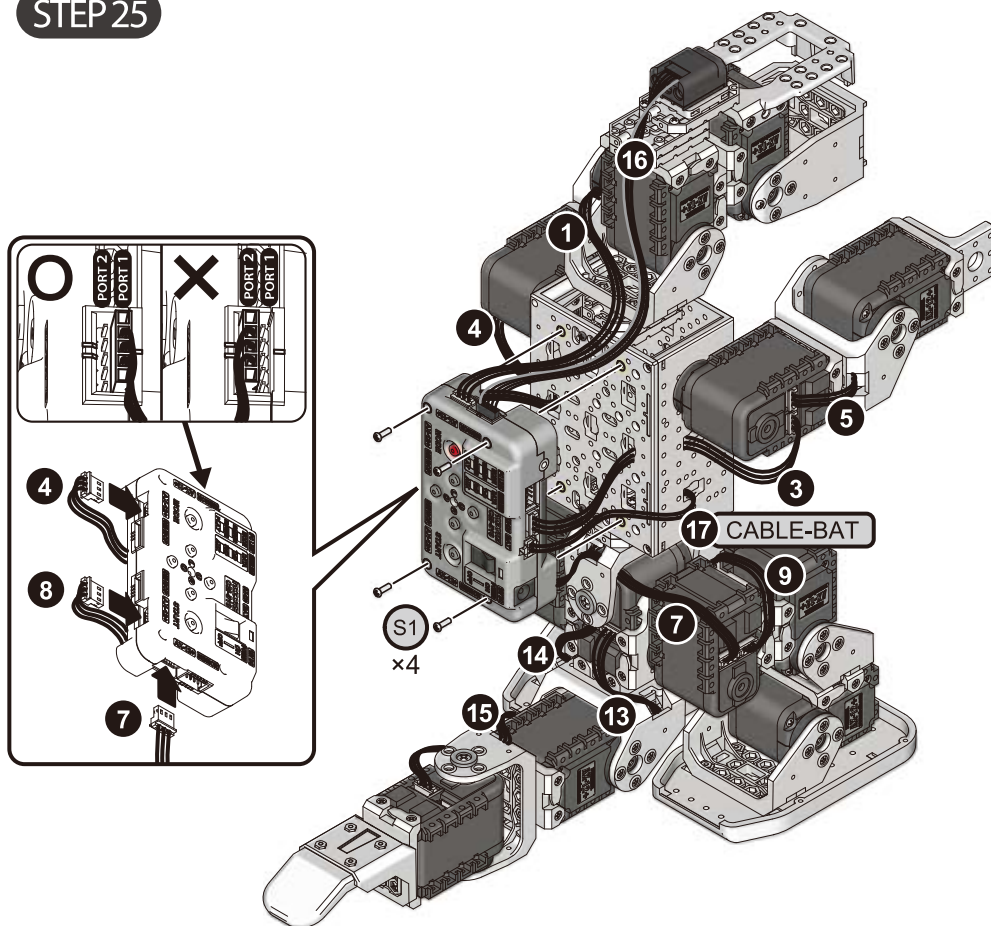

ID 1 motor	◀ 1 CABLE-14 ▶	CM-510	ID 9 motor	◀ 9 CABLE-10 ▶	ID 7 motor
ID 2 motor	◀ 2 CABLE-6 ▶	ID 1 motor	ID 10 motor	◀ 10 CABLE-10 ▶	ID 8 motor
ID 3 motor	◀ 3 CABLE-18 ▶	CM-510	ID 11 motor	◀ 11 CABLE-10 ▶	ID 9 motor
ID 4 motor	◀ 4 CABLE-18 ▶	CM-510	ID 12 motor	◀ 12 CABLE-10 ▶	ID 10 motor
ID 5 motor	◀ 5 CABLE-14 ▶	ID 3 motor	ID 13 motor	◀ 13 CABLE-18 ▶	ID 11 motor
ID 6 motor	◀ 6 CABLE-14 ▶	ID 4 motor	ID 14 motor	◀ 14 CABLE-14 ▶	ID 13 motor
ID 7 motor	◀ 7 CABLE-14 ▶	CM-510	ID 15 motor	◀ 15 CABLE-14 ▶	ID 14 motor
ID 8 motor	◀ 8 CABLE-18 ▶	CM-510	IR SENSOR ◀ 16 5P-CABLE 15 ▶ CM-510 PORT 1		
			CM-510 ◀ 17 CABLE-BAT ▶	BAT	



## STEP 26

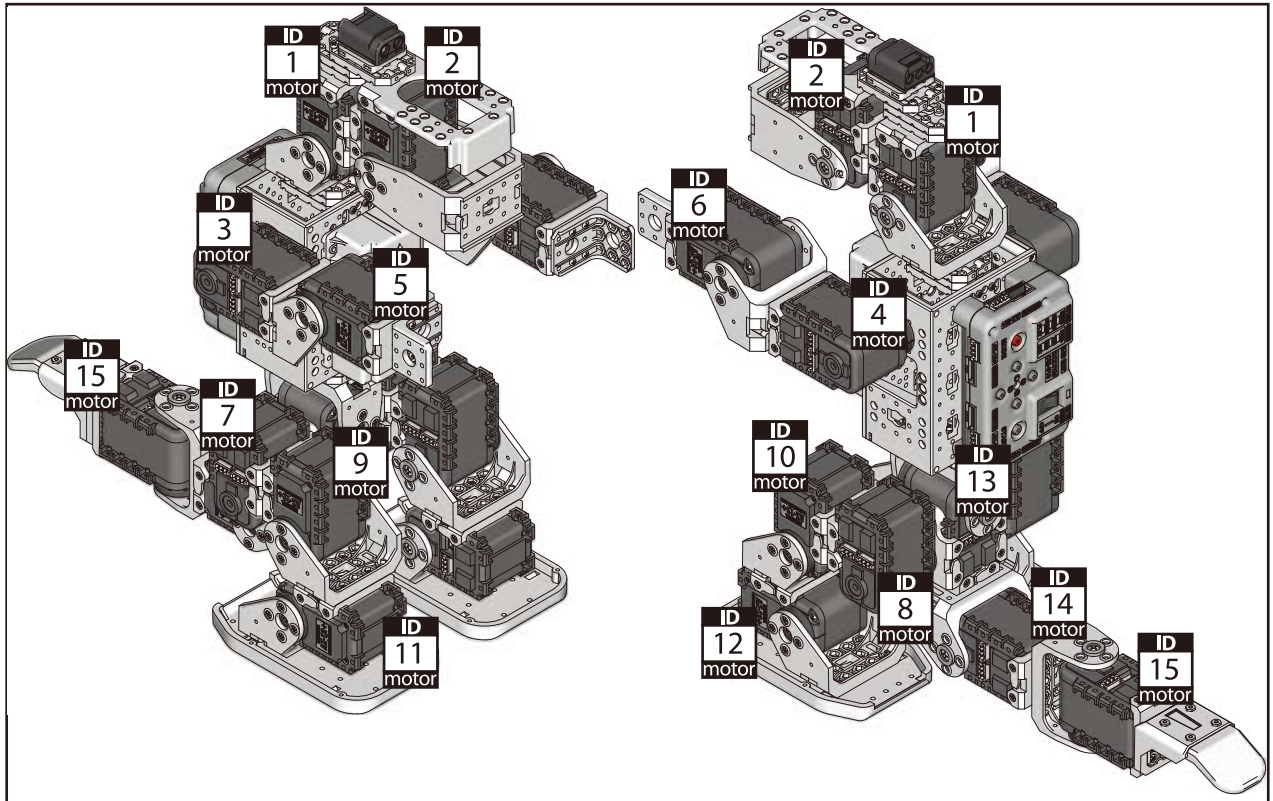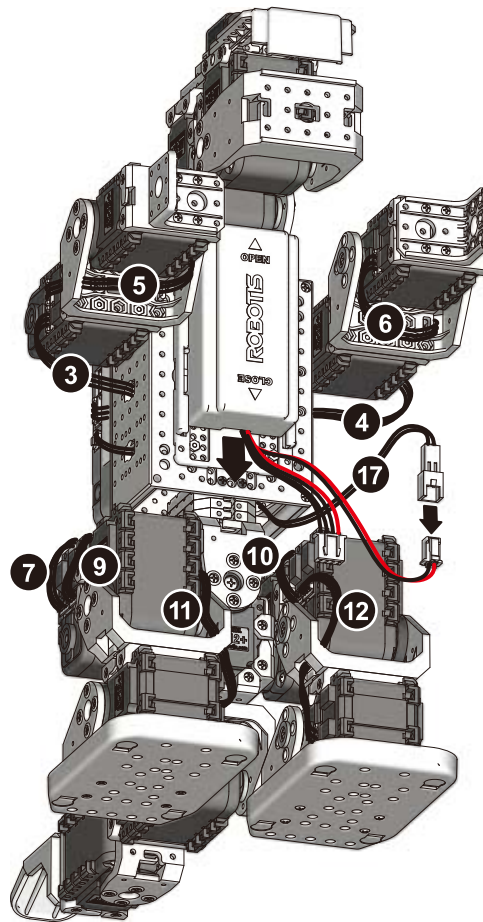



## Assembly Check

After assembly, please check the following procedure to ensure correctness.

### STEP 1

#### Run the assembly check program

Set the robot in **PLAY** mode; hold the **D** button then press **START**.

Once the **START** button is pressed, the assembly check program begins.

### STEP 2

#### AX12+ initial position and ID check

Select each actuator separately and compare it to the picture below.

Ensure the actuators' horns are properly aligned (the horn's notch should be aligned with the actuator's).

Pressing the **U** or **D** button, select one actuator at a time.




The selected actuator's LED lights up and goes to its initial position.

Check starts from ID1.

**U** moves to the next ID in ascending numerical order; **D**, in descending numerical order.



If the actuator's ID does not exist, then the robot beeps.

Although the LED may lit, if there is no power, then check the wiring on the actuator.

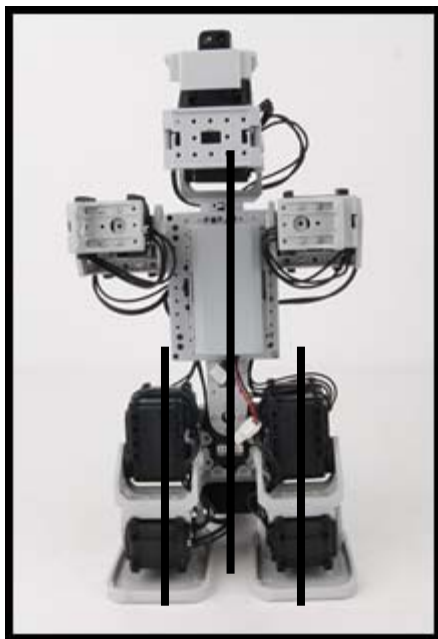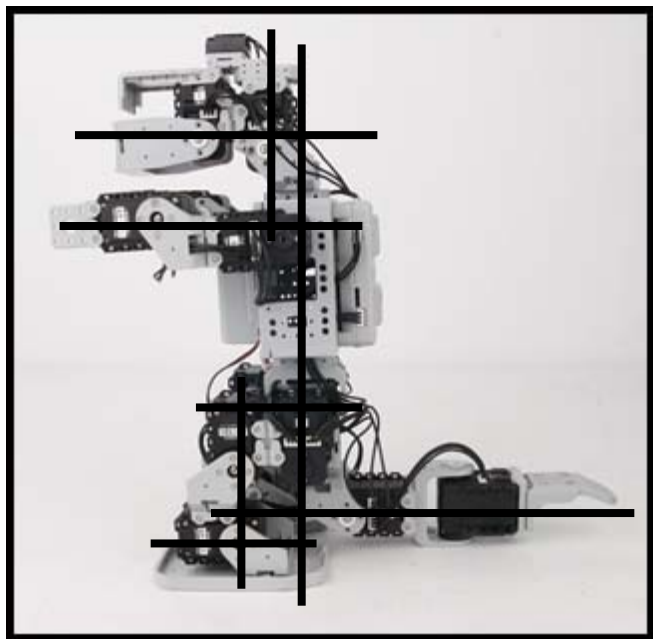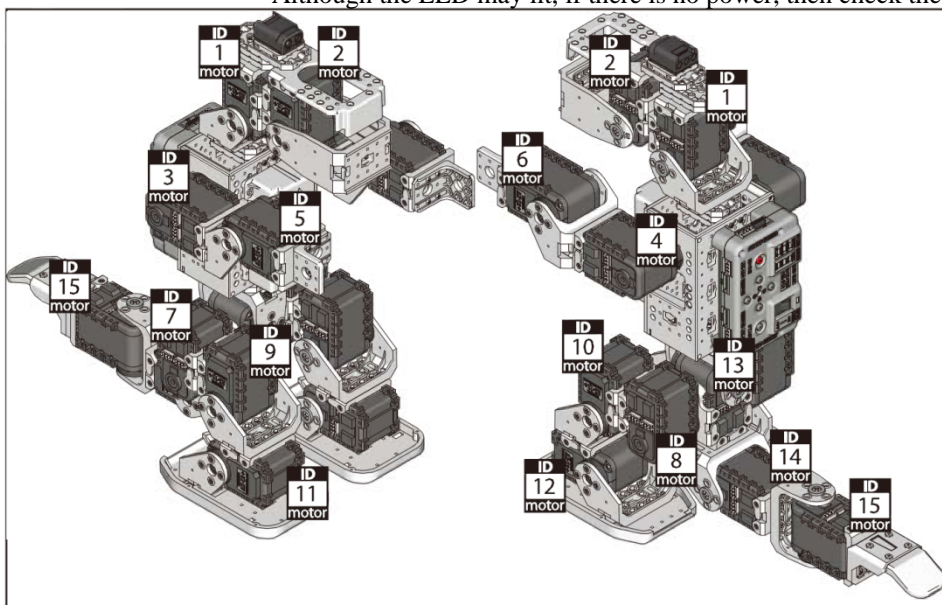

**STEP 3****Sensor and behavior check**

From STEP② press **R**. The robot returns to its initial position as pictured above. Place your hand close to the sensors, as pictured below. Then, robot behavior begins. If the robot does not behave, as pictured below, then check the sensor wiring and its port. Pressing **L** will return the robot back to STEP②.

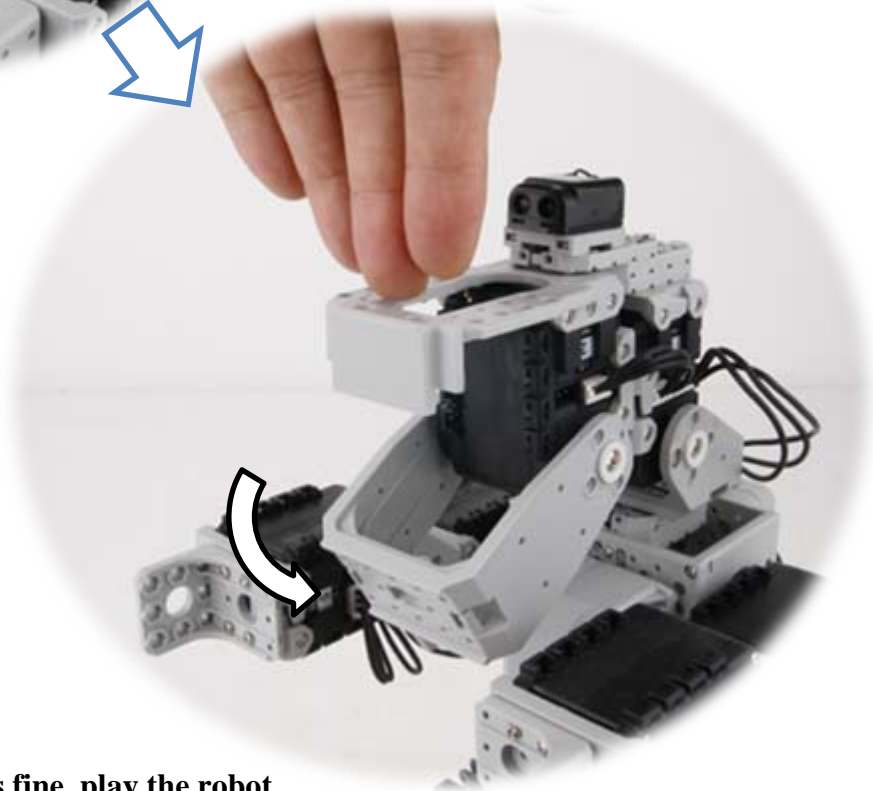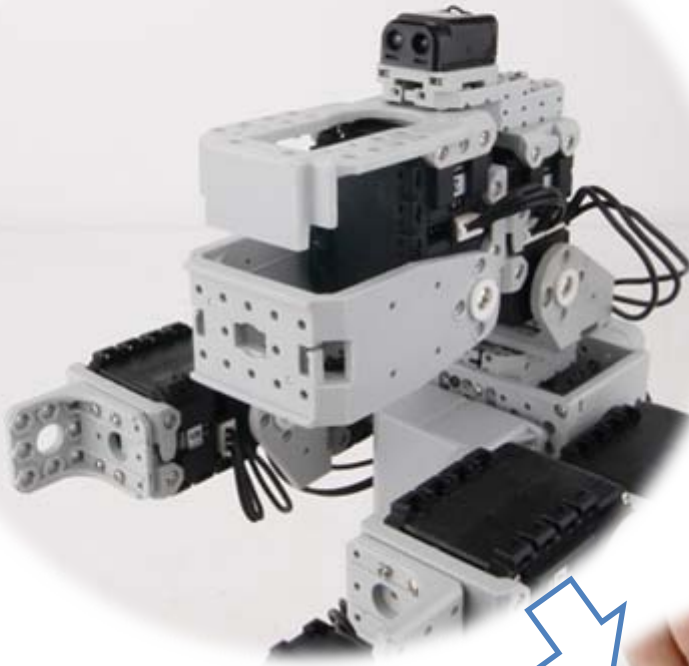**STEP 4****If everything works fine, play the robot.**

Set the robot in **PLAY** mode, and press **START**. The robot will play.